



Made of impact-resistant PP – no metal reinforcements – this pallet is ideal for semi-hygienic applications and for high-rotation usage such as open or closed pools. The pallet is made using gas-assist technology, meaning that internal hollow channels make the pallet more rigid. This benefit is especially useful when the pallet is used in racks. The excellent design guarantees the pallet has a long life, and provides inherent impact resistance.





Rounded borders reduces the risk of fork access damage



Available in




Available with various anti-slip options

Technical data*1

	Bottom support	Top deck		Load capacities*2 [kg]			Weight [kg]		Pallets per	
			Dimensions [mm]	Static	Dynamic	Racking	PP	Р0	Stack	Truck
Endur i7 (OD-3R)	3 runners	open		5000	2500	1250	20,0	_	15	390
Endur i7 (CD-3R)		closed					21,0			
Endur i7 (OD-5R)	5 runners	open	1200 1000 1/0				21,0			
Endur i7 (CD-5R)		closed	1200 x 1000 x 160				22,0			
Endur i7 (OD-6R)	6 runners	open					22,0			
Endur i7 (CD-6R)		closed					23,0			

Entry: 4 ways | Nesting height: - | Safety rim: 7 mm (optional without)

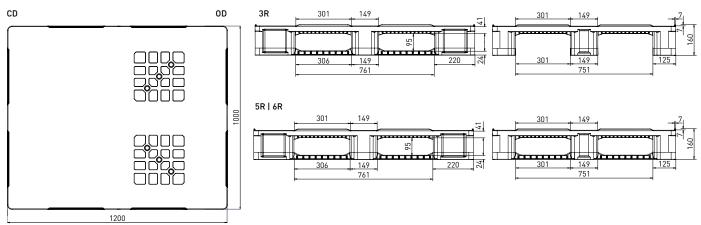

nominal sizes in mm


Options

Anti-slip: safety rim, strips on deck, strips under blocks, grommets on deck (OD), grommets under


deck

ESD prevention: anti-static, conductive

- > Individual marking*3
- > RFID transponders
- > Fire retardant







*¹ Figures can vary depending on the raw material used and options applied. *² Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *³ Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.