

Endur S7.2

1250 x 1050



Plastic pallet with optimized impact resistance structure for loads up to 1250 kg in the high rack

Durable, resistant, and extremely robust - the high-quality plastic pallet Endur S7.2 is especially suitable for applications with high circulation rates and for storing heavy loads in high racks. The cylindrical geometry of the outer edges absorbs impacts and protects the pallet from damages during handling. This guarantees a long life span of the pallet. The pallet is metal-reinforced, this makes it particularly suitable for storage in the high rack.

Bottom support




> 5 runners (5R)

Deck options



> open deck (OD)

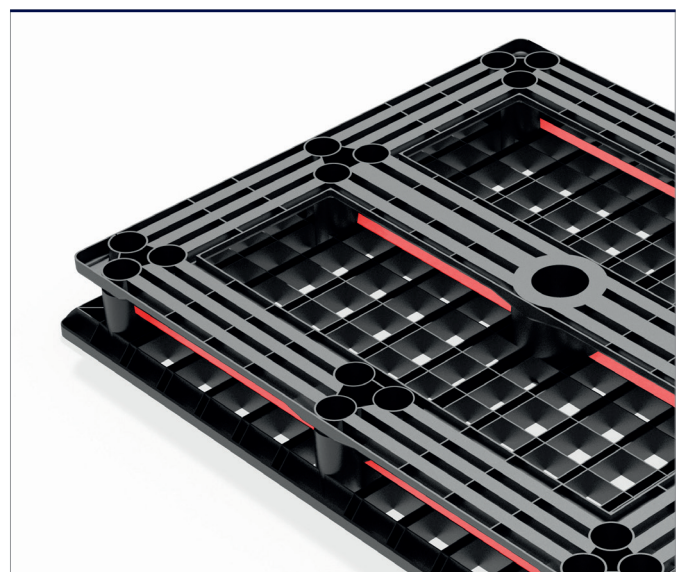




Metal-reinforcement (marked in red) allows long term storage of heavy loads in the high rack.

Technical data*1

	Bottom support	Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]	
				Static	Dynamic	Racking	HDPE	PO
Endur S7.2 (0D-5R-M3)*	5 runners	open	1250 x 1050 x 150	4000	1500	1250	20,0	—
Endur S7.2 (0D-5R)						—	14,5	

* 20 mm steel reinforcement | Wall thickness 2,0 mm

Entry: 4 ways | Nesting height: — | Safety rim: —

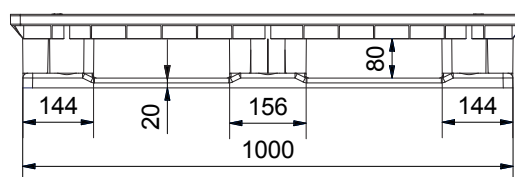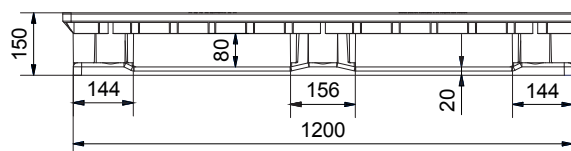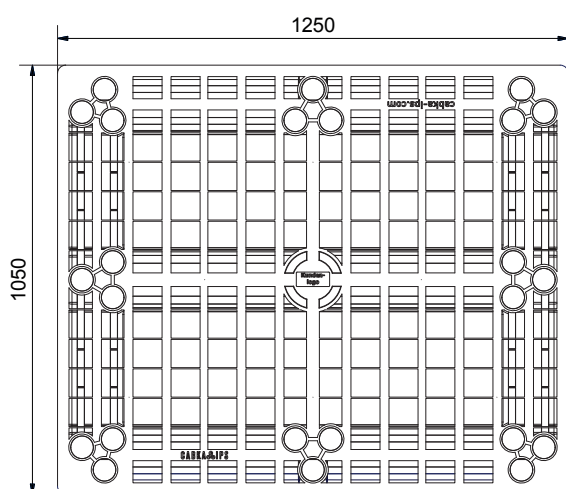

nominal sizes in mm

Options

Color: ■ (other colors on request*3)

> Individual marking*3

Anti-slip: —

> RFID transponders

ESD prevention: —



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.

en 2017-05-22