

Nest US5.1

1219 x 1016



Nestable plastic pallet in imperial units 48" x 40" for medium loads

The Nest US5.1 is the newest universal 48x40 inch pallet. Suitable for medium loads, it offers a choice between a nestable version and three different skid versions (3, 5 and 6 skids). All versions are also available with a closed deck. This protects the cargo from pressure points and soil from below.

Bottom support



> 9 feet (9F)



> 3 runners (3R)



> 5 runners (5R)



> 6 runners (6R)

Deck options



> open deck (OD)



> closed deck (CD)




Optional without safety rim

Technical data*1

	Bottom support	Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]		Pallets per	
				Static	Dynamic	Racking	HDPE	PO	Stack	Truck
Nest US5.1 (OD-9F)	9 feet, nestable	open	1219 x 1016 x 140	4000	1400	-	7,5	9,0	50	1300
Nest US5.1 (CD-9F)		closed			2000		9,5	10,5		
Nest US5.1 (OD-3R)	3 runners	open	1219 x 1016 x 150	8000	2400	600	11,5	13,0	15	390
Nest US5.1 (CD-3R)		closed					13,5	14,5		
Nest US5.1 (OD-5R)	5 runners	open	1219 x 1016 x 150	8000	2400	600	12,0	14,0	15	390
Nest US5.1 (CD-5R)		closed					14,0	15,5		
Nest US5.1 (OD-6R)	6 runners	open	1219 x 1016 x 150	8000	2400	600	12,5	14,5	15	390
Nest US5.1 (CD-6R)		closed					14,5	16,0		

Entry: 4 ways | Nesting height: 40 mm | Safety rim: 6 mm (optional without)

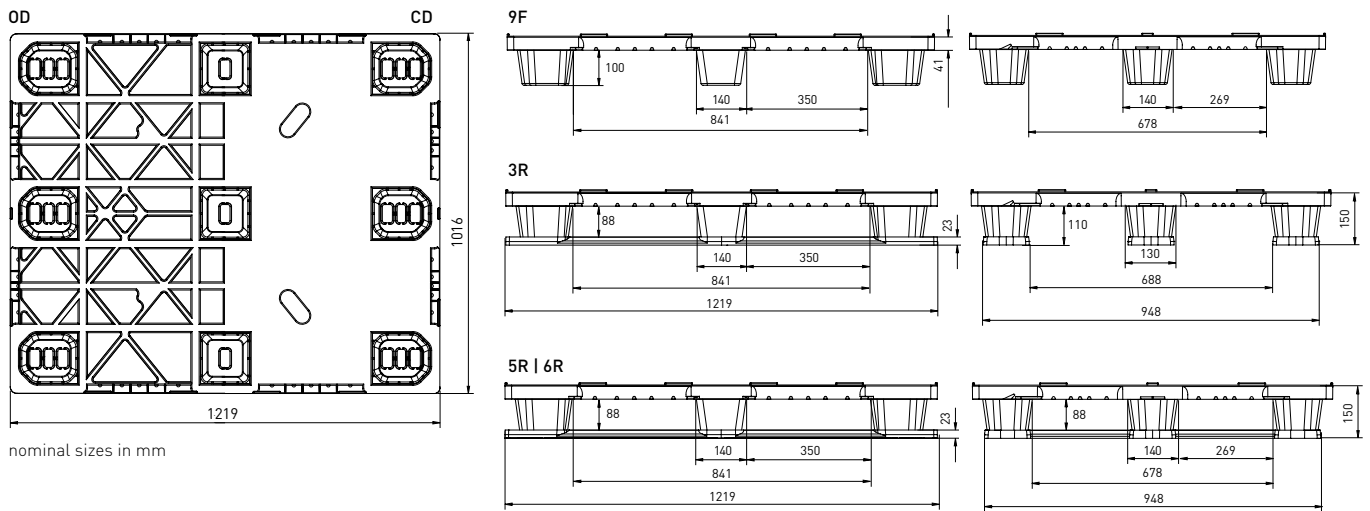

Options

- Color: (other colors on request*3) > Individual marking*3
- Anti-slip: safety rim
- ESD prevention: -



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.